

LIGHT

Electro-Optical Characteristics











Electro-Optical Characteristics (Temperature=25°C)


							μ
	λ						
	Δλ						
	θ						

以上 厂商

manufacturer

Typical Characteristics Curves

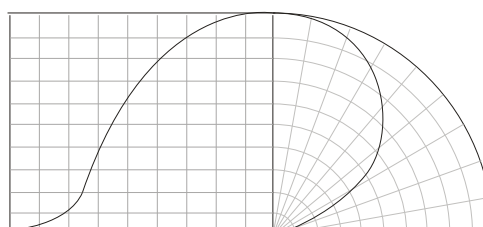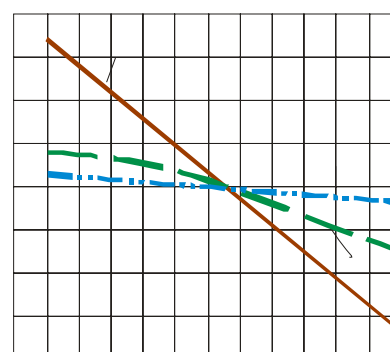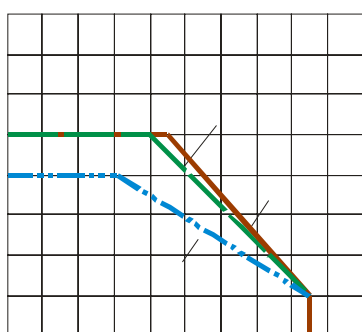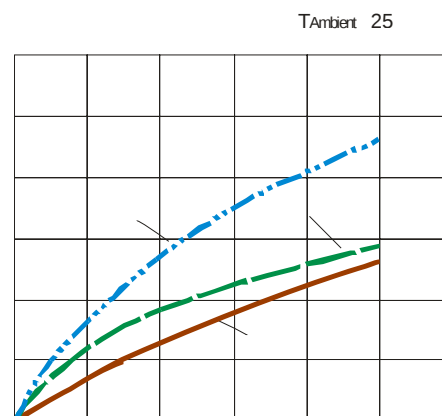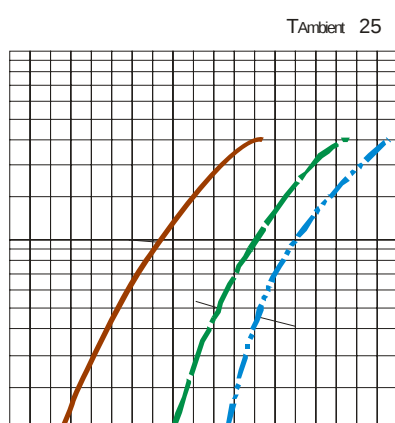

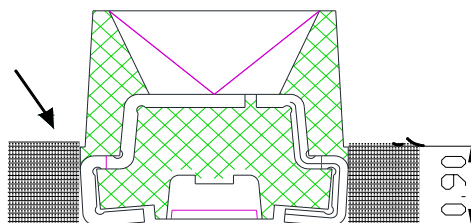


2

Packaging(2)



Moisture Proof and Anti-Electrostatic Foil Bag

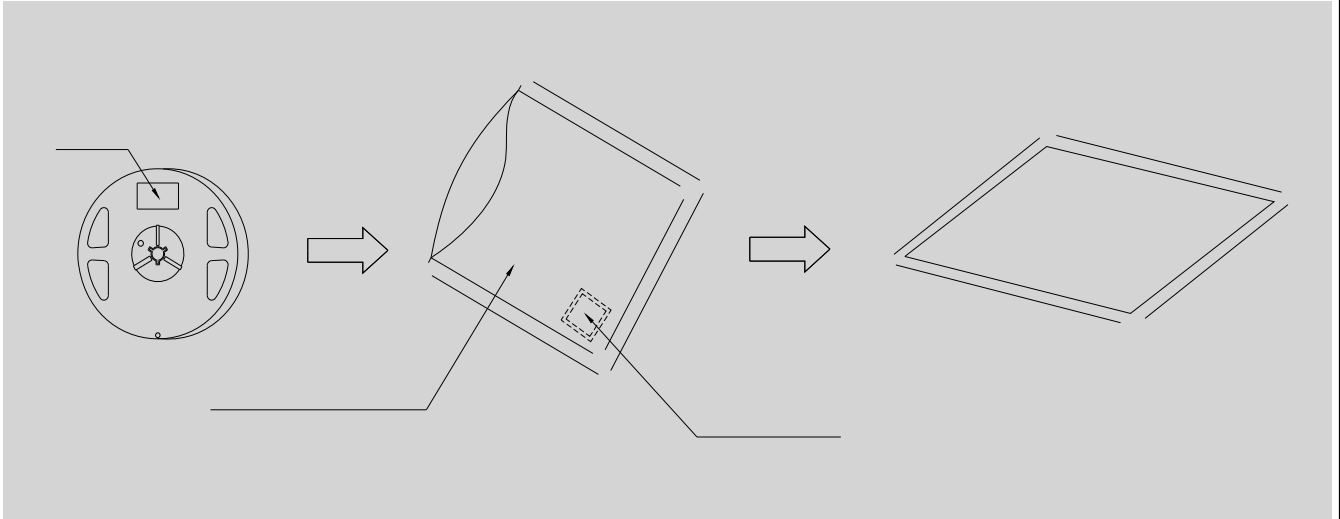

Cardboard Box



Label Explanation

L

2

Guideline for Soldering (2)

3.

Cleaning

+

N L L N L N + L L N L N L + L L N

(1)

Precautions (1)

1.

Storage

-

-

-

-

-

2.

Static Electricity

-

-

-

(2)



Precautions (2)

3.

Design Consideration

•

•

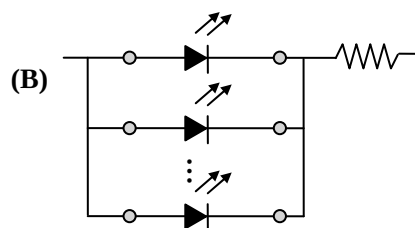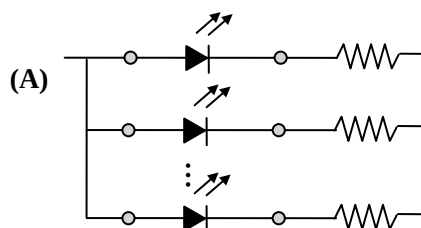

•

4.

Reverse voltage protection

•

•

(3)

Precautions (3)

5.


The safe temperature for LEDs working

-

6.

Others

-

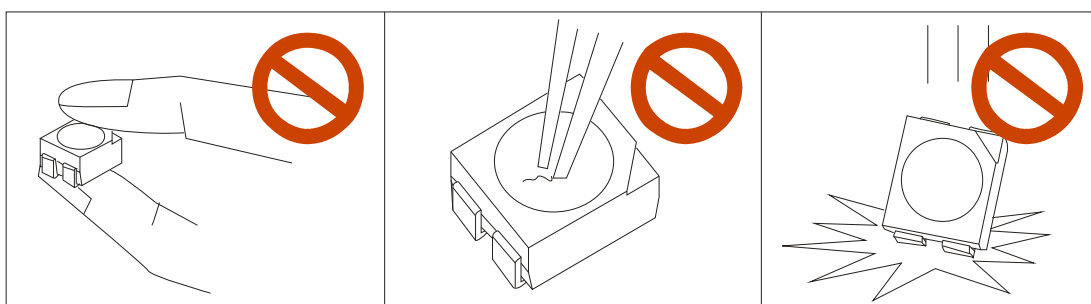

-