

SL-T1921SYC020-L190

DATA SHEET

SPEC. NO. : SZ20062202
DATE : 2020/09/16
REV. : A/1

Approved By:

Checked By:

Prepared By:





Electrical Optical Characteristics at Ta=25°C

Parameter	Symbol		Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	S12	145	---	185	mcd	I _F =20mA (Note 1)
		S13	185	---	240		
		S14	240	---	310		
Viewing Angle	2θ _{1/2}		---	110	---	Deg.	(Note 2)
Peak Emission Wavelength	λ _p		---	585	---	nm	I _F =20mA
Dominant Wavelength	λ _d	Y1	585	---	589	nm	I _F =20mA (Note 3)
		Y2	589	---	593		
Spectral Line Half-Width	λ		---	15	---	nm	I _F =20mA
Forward Voltage	V _F	V2	1.8	---	2.1	V	I _F =20mA
		V3	2.1	---	2.4		
Reverse Current	I _R		---	---	10	μA	V _R =5V

Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity: ±15%.
2. θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength, λ_d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device. Tolerance of Dominant Wavelength: ±1.0nm.
4. Tolerance of Forward Voltage: ±0.1V.



LIGHT




Carrier Tape Specifications(Loaded Quantity: 2000PCS/reel)

Moisture Resistant Packaging



Original Product Solid State LED

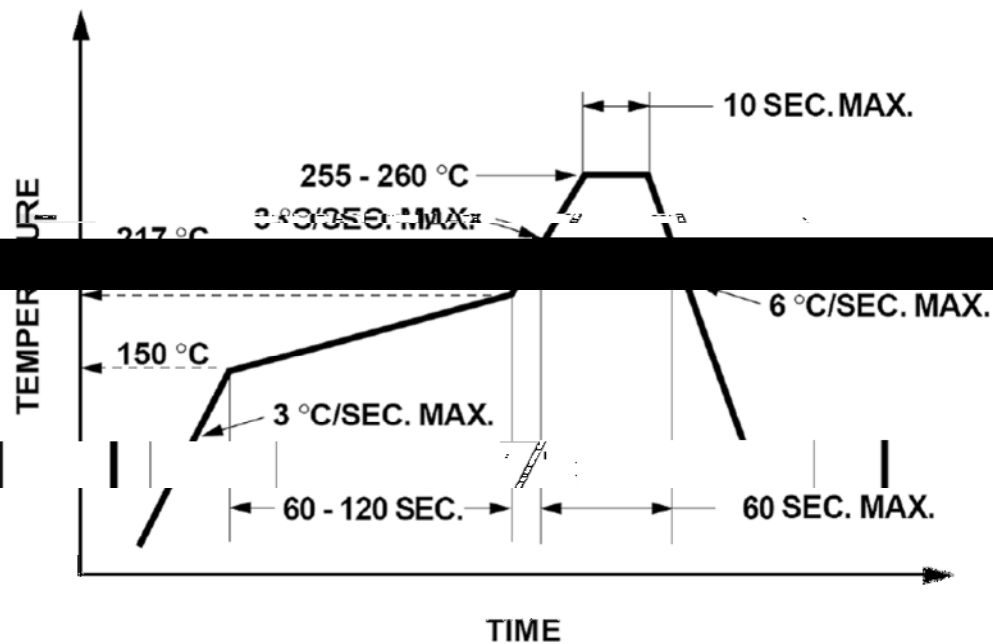

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

Soldering iron

1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
2. The hand solder should be done only once.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

