



LIG












Storage $O(1)$ Storage req


LIGHT




Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

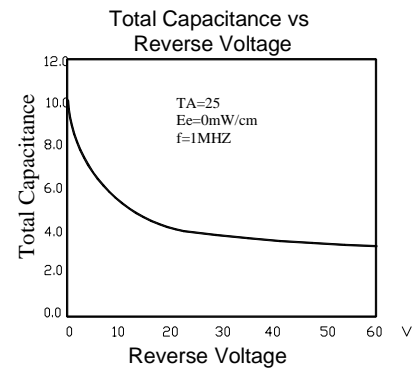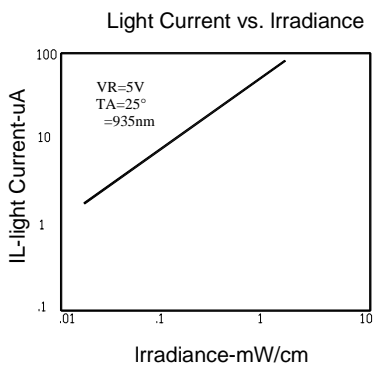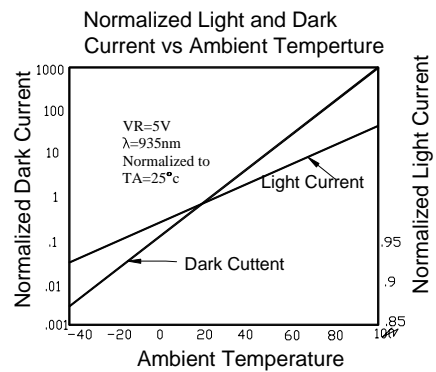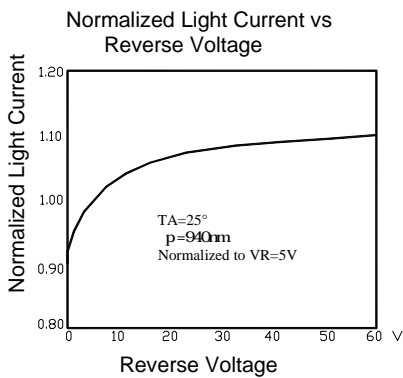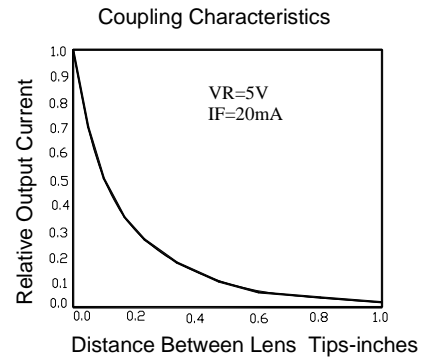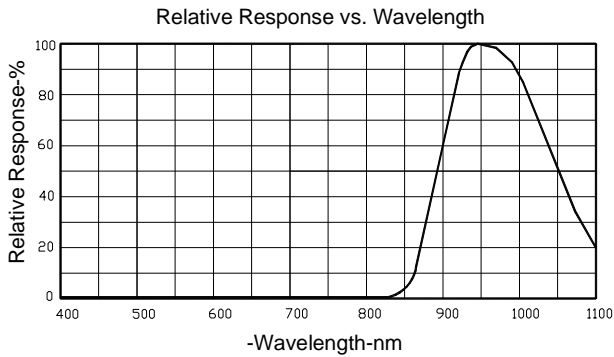

Sensitivity Diagram

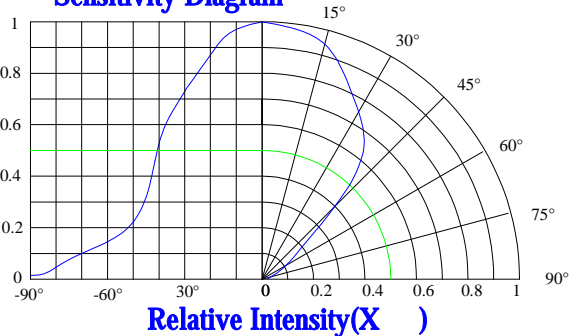

Sensitivity Diagram

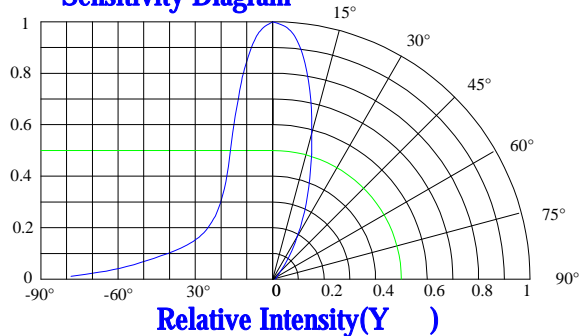

Infrared Photo Diode Specification

-

Label Explanation

IT Universal Label

Customer Defined Label



EL NAME

QUANTITY

BL

PACKING D

REMA

Carrier Tape Specifications (Loaded Quantity: 2300pcs/reel)

ITEM	W	A0	A1	B0	B1	K0	E	F	D0	D1	P0	P1	P2	T
DI M	12.00	4.35	2.05	4.40	4.10	3.65	1.75	5.50	1.50	1.60	4.00	8.00	2.00	0.30
TOL	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05

