

LG-05IR4T94C-557C-B-T

DATA SHEET

SPEC. NO. : SZ21042902
DATE : 2021/04/29
REV. : A/0

Approved By:

Checked By:

Prepared By:

Absolute Maximum Ratings at Ta=25°C


Parameter	MAX.	Unit
Power Dissipation	75	mW
Continuous Forward Current	50	mA
Peak Forward Current ^{*3}	1.0	A
Reverse Voltage	5	V
Operating Temperature	-40 to + 85	
Storage Temperature	-40°C to + 100°C	
Lead Soldering Temperature [2mm From Body]	260°C for 3 Seconds	
IR Reflow Temperature	245°C for 30 seconds	

1. Storage

Peak Wavelength		---	940	---	Unit nm	$I_F=20mA$	
-----------------	--	-----	-----	-----	---------	------------	--

保潔

保潔

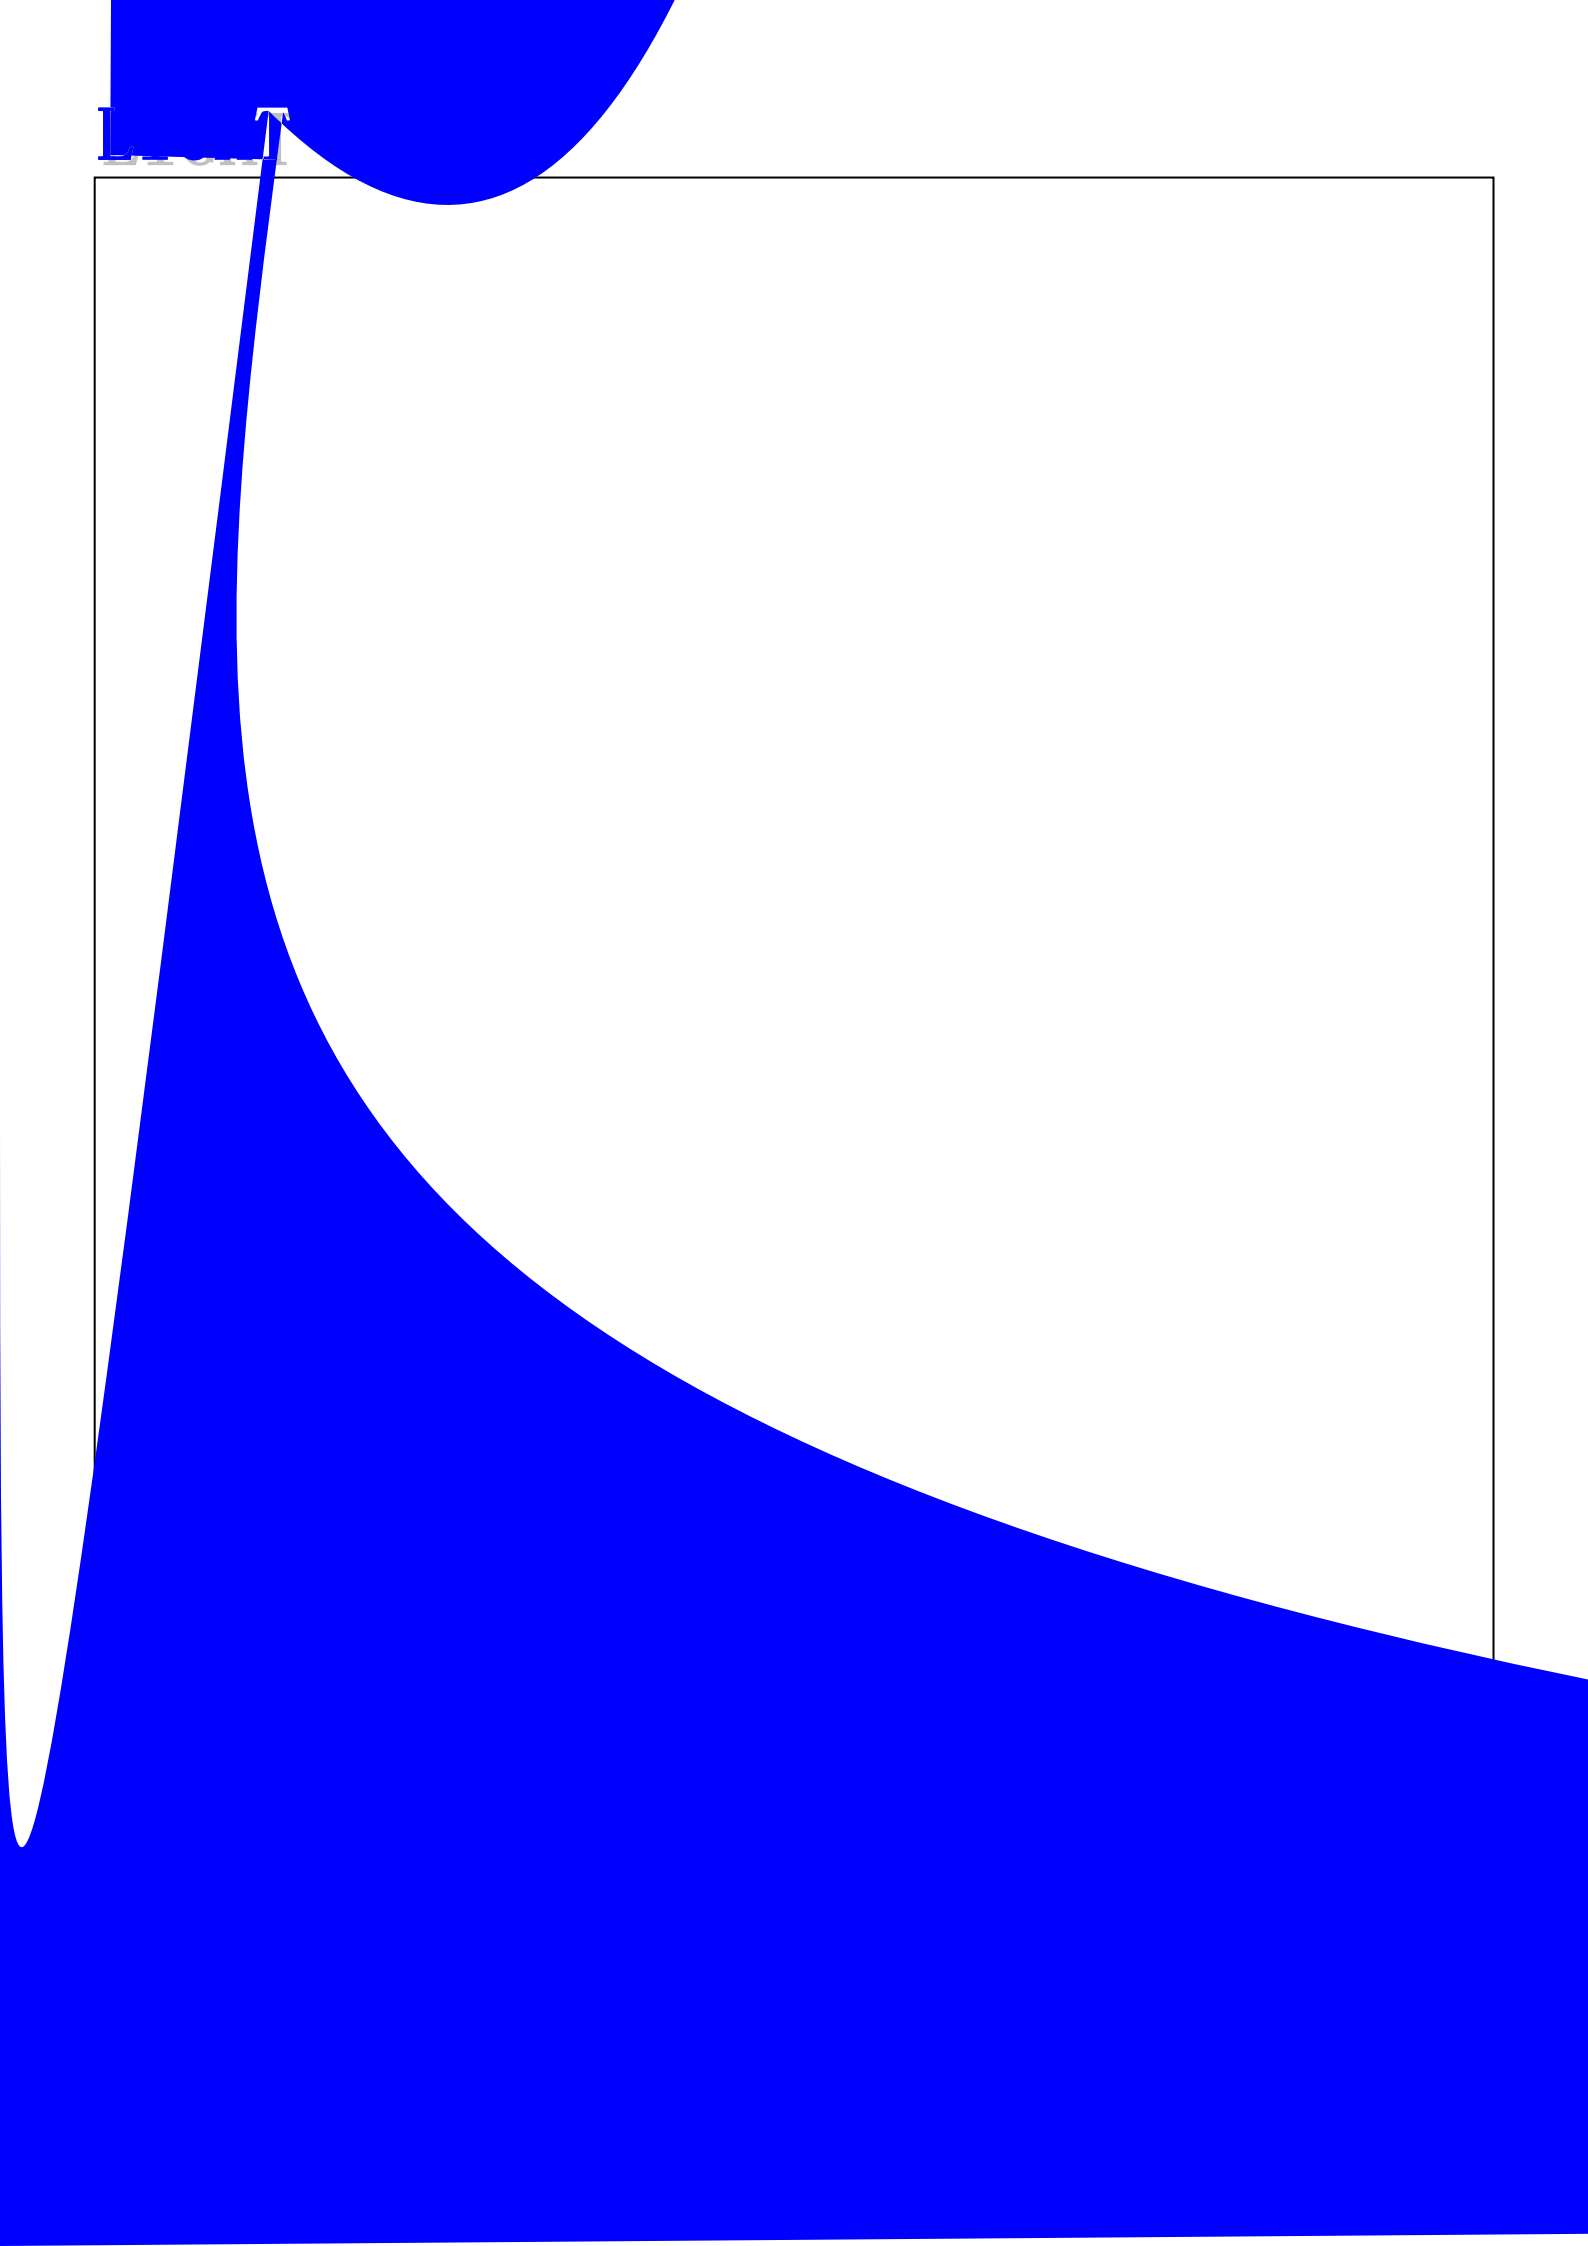

保潔