



1	DIN		
2	VDD		
3	DOUT		
4	GND		





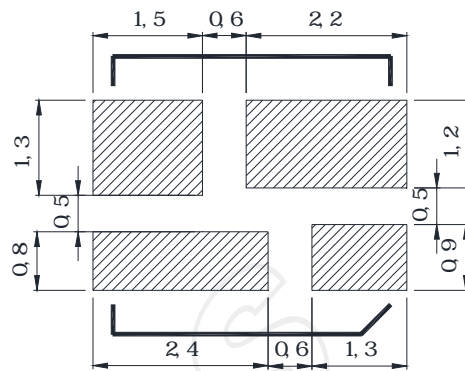


	fDIN	---	800	---	KHZ	67% 1
DOUT	T <sub>PLH</sub>	---	---	500	ns	DIN→DOUT
	T <sub>PHL</sub>	---	---	500	ns	
I <sub>out</sub>	T <sub>r</sub>	---	100	---	ns	V <sub>DS</sub> =1.5V I <sub>OUT</sub> =13mA I <sub>out</sub> =5mA
	T <sub>f</sub>	---	100	---	ns	

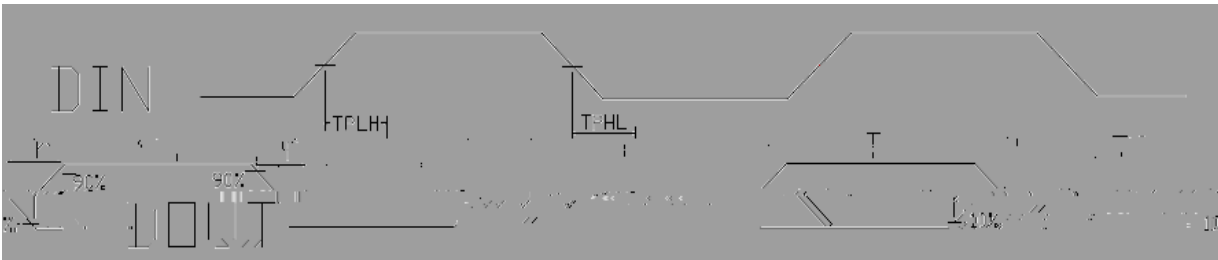


		Min.		Max.	
T		1.20	--	--	μs
T0H	0	0.2	0.3	0.4	μs
T0L	0	0.8	--	--	μs
T1H	1	0.58	0.64	1.0	μs
T1L	1	0.2	--	--	μs
Trst	Reset	>80	--	--	μs

1. "0" "1"
2. 1.2μs
3. "0" "1" 20μs.

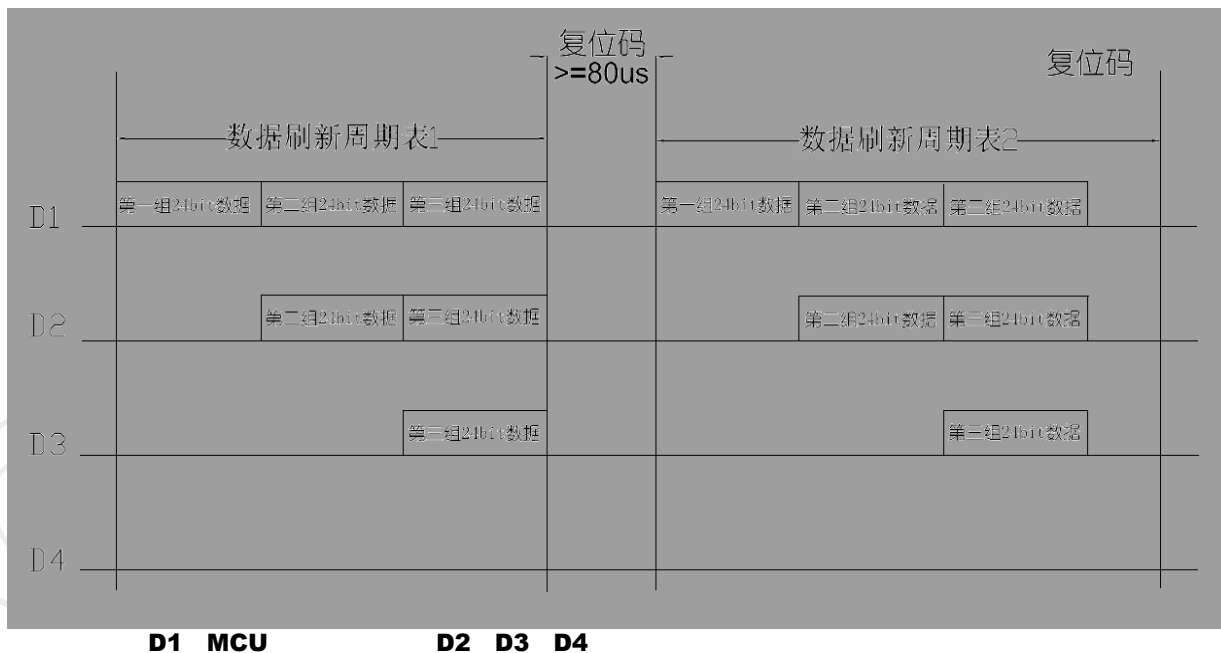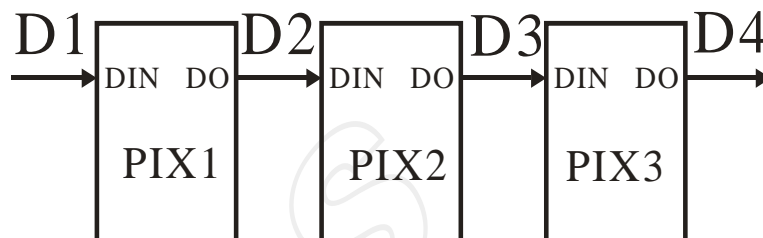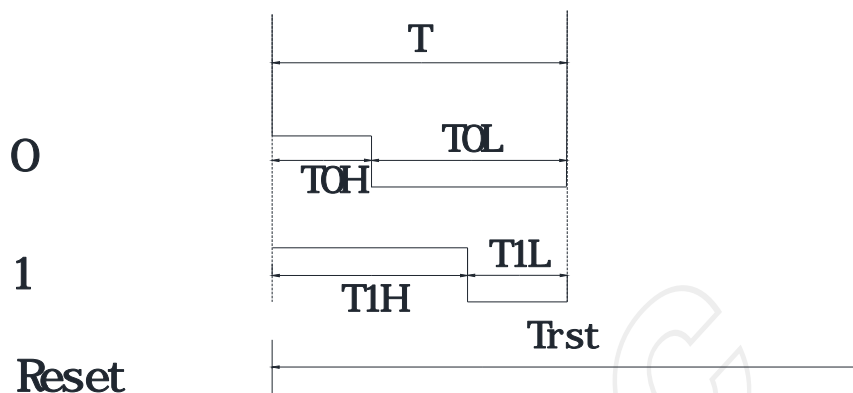

G7	G6	G5	G4	G3	G2	G1	G0	R7	R6	R5	R4
R3	R2	R1	R0	B7	B6	B5	B4	B3	B2	B1	B0

**GRB** (G7 → G6 →.....B0)

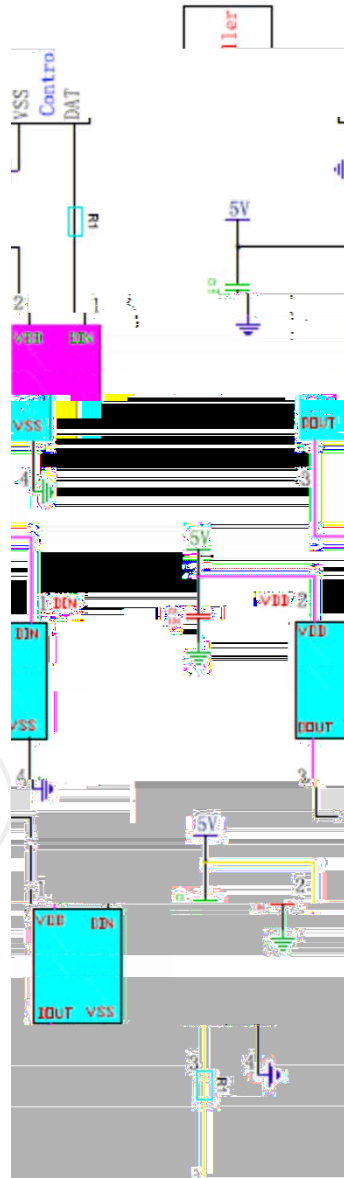

**IC**


**IC**

**500**

**R1**

**LIGHT**

**LIGHT ELECTRONICS CO., LTD.**






1		100 ± 5° C ~ -40° C ± 5° C 30min~30min 300cycles	MIL-STD-202G	0/22
2		Ta= +100°C 1000hrs	JEITA ED-4701 200 201	0/22
3		Ta= -40°C 1000hrs	JEITA ED-4701 200 202	0/22
4		Ta=60°C RH=90% 1000hrs	JEITA ED-4701 100 103	0/22
5		- 55°C~25°C~100°C~25°C 30min~5min~30min~5min 100 cycles	JEITA ED-4701 100 105	0/22
6		Tsld = 260° C, 10sec. 3 times	JEITA ED-4701 300 301	0/22
7		25° C, IF: Typical current , 1000hrs	JESD22-A 108D	0/22

	IV	DC=5V,	X0.7	---
	---	DC=5V,		

LIGHT


**LIGHT ELECTRONICS CO., LTD.**






**LIGHT**

**LIGHT ELECTRONICS CO., LTD.**



x	p	
	i	
	x	
i	x	
p		

. SMT

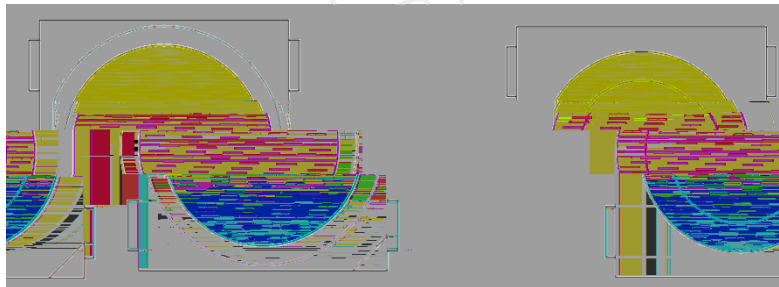

PCB

LED

0.5T  
LEDs

PCB

PCB



. LED LED PCB LED  
. LED LED  
. 60  
. IC LED  
. IC  
. IC LED LED  
. LED  
. LED  
LED LED  
LED